


**TYPICAL CROSS SECTION OF TRENCH FOR
REINSTATEMENT ON FOOTHPATH/PASSAGES**

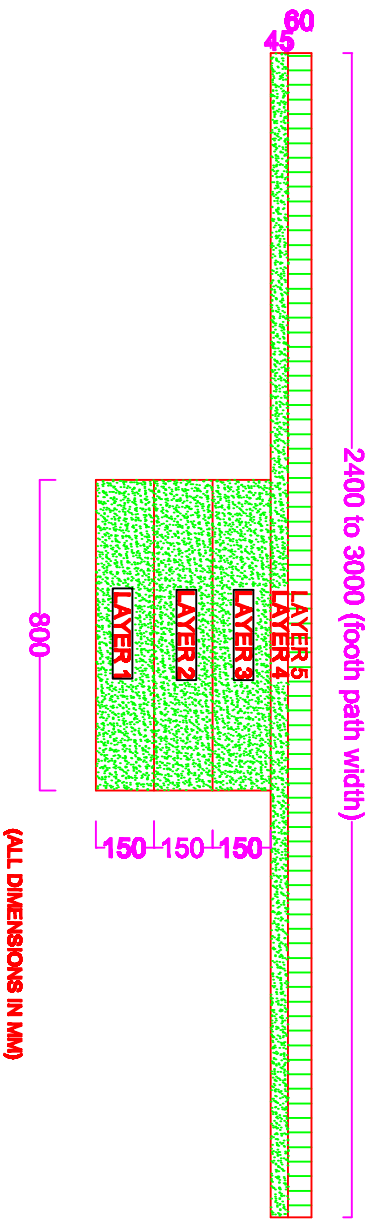

**Layer wise details for item/materials to be
used & its compaction**

| Layer No. | PMC Item DSR code no. | Description of Material | Remarks |
|-------------|--------------------------|---|---|
| Layer 1 | Road part 2-8-1 88815 | Granular Sub base Material | Sufficient watering & Ramming by Utility |
| Layer 2 & 3 | Road part 2-8-1 88815 | Granular Sub base Material | Sufficient watering & Ramming by Reinstatement contractor |
| Layer 4 + 5 | Road part 8-2-1 88941 | Griff/Crushed sand/ River sand cushioning & C. C. paver Block | _____ |

**NOTE : 1) The thickness and No. of Layers Granular Sub base Material
filling will depend on proposed depth of excavation
as per application from utility Annexure - 1**

**2) The maximum thickness of each Layer of Granular Sub base Material
shall not be exceed 150 mm.**